

Tiger Tail Ct Fireshed



This fire shed consists of young Live Oak trees as well as some more established larger diameter oak trees, coyote brush and poison oak.

The main vegetation treatments in this polygon will be mastication and chipping. Burn piling to be created by hand crews, burn management by MOFD. In the areas of the polygon that border residential properties, where access is appropriate, vegetation may be carried out of the property to be chipped and hauled.

Non-native trees and vegetation will be removed. Oaks and other remaining trees with trunk diameters roughly 6" or less will be removed. Coyote brush, poison oak and other brush will be removed leaving the mature healthy trees to create a shaded fuel break across these areas. Care will be taken to leave buffer zones around sensitive habitat, waterways and creeks.

Following the initial treatment, yearly maintenance in the spring before fire season to cut annual grasses, suppress brush regrowth and keep tree canopies to a minimum of 6' using weed whackers, mowers/masticators and chippers.

Estimated Cost of initial treatment: \$192,000.00


Estimated Cost of Maintenance One Year After Initial Treatment: \$31,000.00

A significant number of properties in the Tiger Tail fire shed have been designated by MOFD as "code compliant". But the fire shed remains at risk.



Most of the properties in the fireshed are members of a Firewise Neighborhood. Yet, there is still \$200,000 of vegetation mitigation work still to be done.

Orinda Firewise Neighborhoods

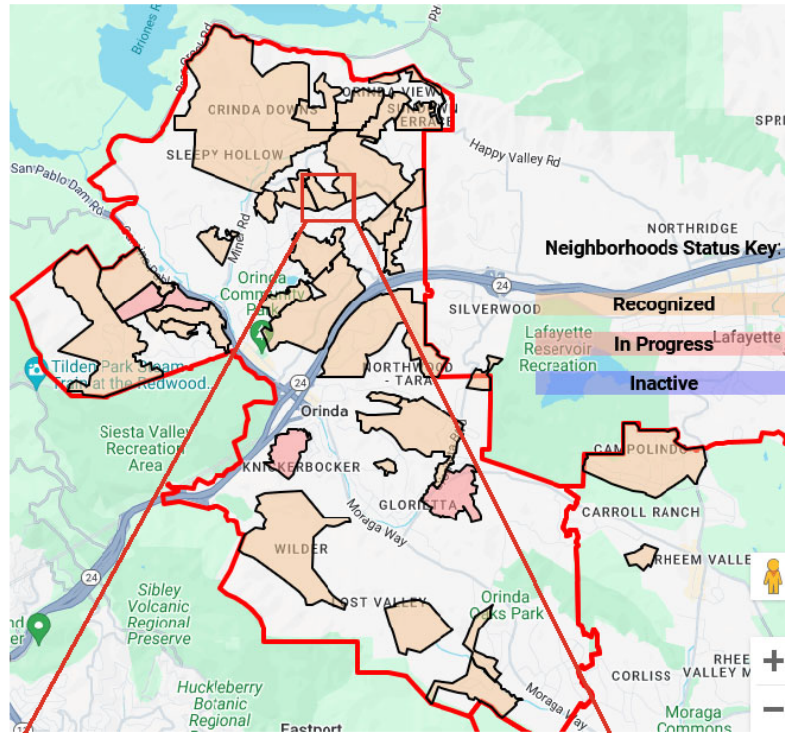

Tiger Tail Ct Firewise Neighborhoods

